


Cool Quadrato


Cool Square

SIMES

PARETE Wall mounted

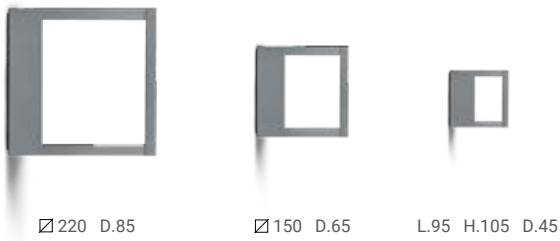

PALETTO Bollard

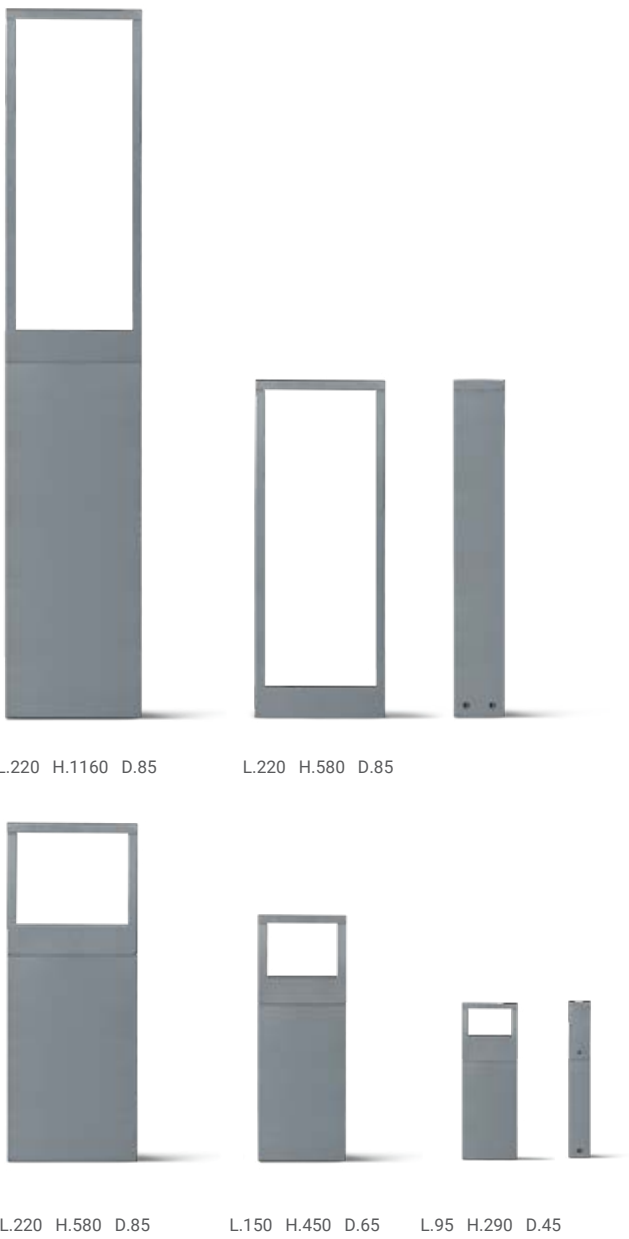

"Peli Porte Sezionali" Headquarters, Castel Mella, Brescia, Italy - Arch. Giuliano Venturelli © Ph.Paolo Stroppa



Cool Quadrato

Cool Square

DESCRIZIONE TECNICA Technical description	INFORMAZIONI GENERALI General information		CODICI COLORE Colour codes
Struttura in alluminio pressofuso. Paletti in alluminio estruso. Diffusore in vetro temprato acidato extrachiaro. Viti in acciaio con rivestimento anticorrosivo. Precablatο con cavo per Microcool Quadrato applique e paletto. Entrata cavo singola per Minicool e Cool Quadrato applique. Die-cast aluminium housing. Bollards in extruded aluminium. Extra-clear acid-etched toughened glass diffuser. Steel screws with anticorrosive coating. Pre-wired Microcool Square applique and bollard. Single cable entry for Minicool and Cool Square applique.	GRADO DI PROTEZIONE IP rating	IP54	.01 Bianco White .09 Nero Black .14 Grigio alluminio Aluminium Grey
	CLASSE DI ISOLAMENTO Insulation class	CLASS I ⚡	
	RESISTENZA IMPATTO Mechanical resistance	IK 06	MODELLO REGISTRATO Registered design

PARETE E PALETTO L95

Wall mounted and bollard L95

MICROCOOL QUADRATO APPLIQUE L95

Microcool Square applique L95

105 45 95	CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.7282H	2700 K		90	260 lm	5.7 W	220-240 Vac	ON-OFF
	S.7282W	3000 K		90	267 lm	5.7 W	220-240 Vac	ON-OFF
	S.7282N	4000 K		90	277 lm	5.7 W	220-240 Vac	ON-OFF

MICROCOOL QUADRATO PALETTO H290

Microcool Square bollard H290

95 45 290	CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.7287H	2700 K		90	260 lm	5.7 W	220-240 Vac	ON-OFF
	S.7287W	3000 K		90	267 lm	5.7 W	220-240 Vac	ON-OFF
	S.7287N	4000 K		90	277 lm	5.7 W	220-240 Vac	ON-OFF



ACCESSORI PER MICROCOOL QUADRATO PALETTO Accessories for Microcool Square bollard	
S.7284	Flangia da interrare per Microcool Quadrato paletto Flange to be buried for Microcool Square bollard

PARETE E PALETTO L150

Wall mounted and bollard L150

MINICOOL QUADRATO APPLIQUE ∅ 150


Minicool Square applique ∅ 150

150 65 150	CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.7281H	2700 K		90	574 lm	8.5 W	220-240 Vac	ON-OFF
	S.7281W	3000 K		90	590 lm	8.5 W	220-240 Vac	ON-OFF
	S.7281N	4000 K		90	612 lm	8.5 W	220-240 Vac	ON-OFF

MINICOOL QUADRATO PALETTO H450

Minicool Square bollard H450

150 65 450	CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.7286H	2700 K		90	574 lm	8.5 W	220-240 Vac	ON-OFF
	S.7286W	3000 K		90	590 lm	8.5 W	220-240 Vac	ON-OFF
	S.7286N	4000 K		90	612 lm	8.5 W	220-240 Vac	ON-OFF



ACCESSORI PER MINICOOL QUADRATO PALETTO Accessories for Minicool Square bollard	
S.7288	Flangia da interrare per Minicool Quadrato paletto Flange to be buried for Minicool Square bollard

PARETE E PALETTO L220

Wall mounted and bollard L220

COOL QUADRATO APPLIQUE ∅ 220


Cool Square applique ∅ 220

220 85 220	CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.7280H	2700 K		90	1625 lm	15.3 W	220-240 Vac	Dali2/ Push
	S.7280W	3000 K		90	1670 lm	15.3 W	220-240 Vac	Dali2/ Push
	S.7280N	4000 K		90	1733 lm	15.3 W	220-240 Vac	Dali2/ Push

COOL QUADRATO PALETTO H580

Cool Square bollard H580

220 85 580	CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.7285H	2700 K		90	1625 lm	15.3 W	220-240 Vac	Dali2/ Push
	S.7285W	3000 K		90	1670 lm	15.3 W	220-240 Vac	Dali2/ Push
	S.7285N	4000 K		90	1733 lm	15.3 W	220-240 Vac	Dali2/ Push




ACCESSORI PER COOL QUADRATO PALETTO Accessories for Cool Square bollard	
S.7289	Flangia da interrare per Cool Quadrato paletto Flange to be buried for Cool Square bollard



PALETTO LONG L220
Bollard Long L220


SIMES

COOL LONG PALETTO H580
Cool Long bollard H580




CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7290H	2700 K		90	1744 lm	15.3 W	220-240 Vac	Dali2/Push
S.7290W	3000 K		90	1793 lm	15.3 W	220-240 Vac	Dali2/Push
S.7290N	4000 K		90	1860 lm	15.3 W	220-240 Vac	Dali2/Push

COOL LONG PALETTO H1160
Cool Long bollard H1160

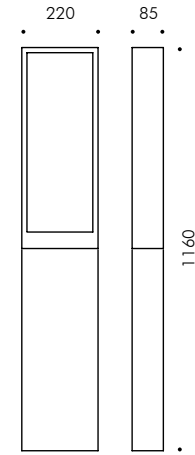

CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7295H	2700 K		90	1744 lm	15.3 W	220-240 Vac	Dali2/Push
S.7295W	3000 K		90	1793 lm	15.3 W	220-240 Vac	Dali2/Push
S.7295N	4000 K		90	1860 lm	15.3 W	220-240 Vac	Dali2/Push



ACCESSORI PER TUTTE LE VERSIONI DI COOL LONG Accessories for all Cool Long versions

S.7289 Flangia da interrare per Cool Long Flange to be buried for Cool Long