

PARETE Wall mounted



L.300 H.24 D.210



L.300 H.140 D.89



Ø170 D.89



Ø240 D.89

PALETTE Bollard




L.300 H.580 D.140



L.170 H.240 D.170



L.240 H.580 D.240

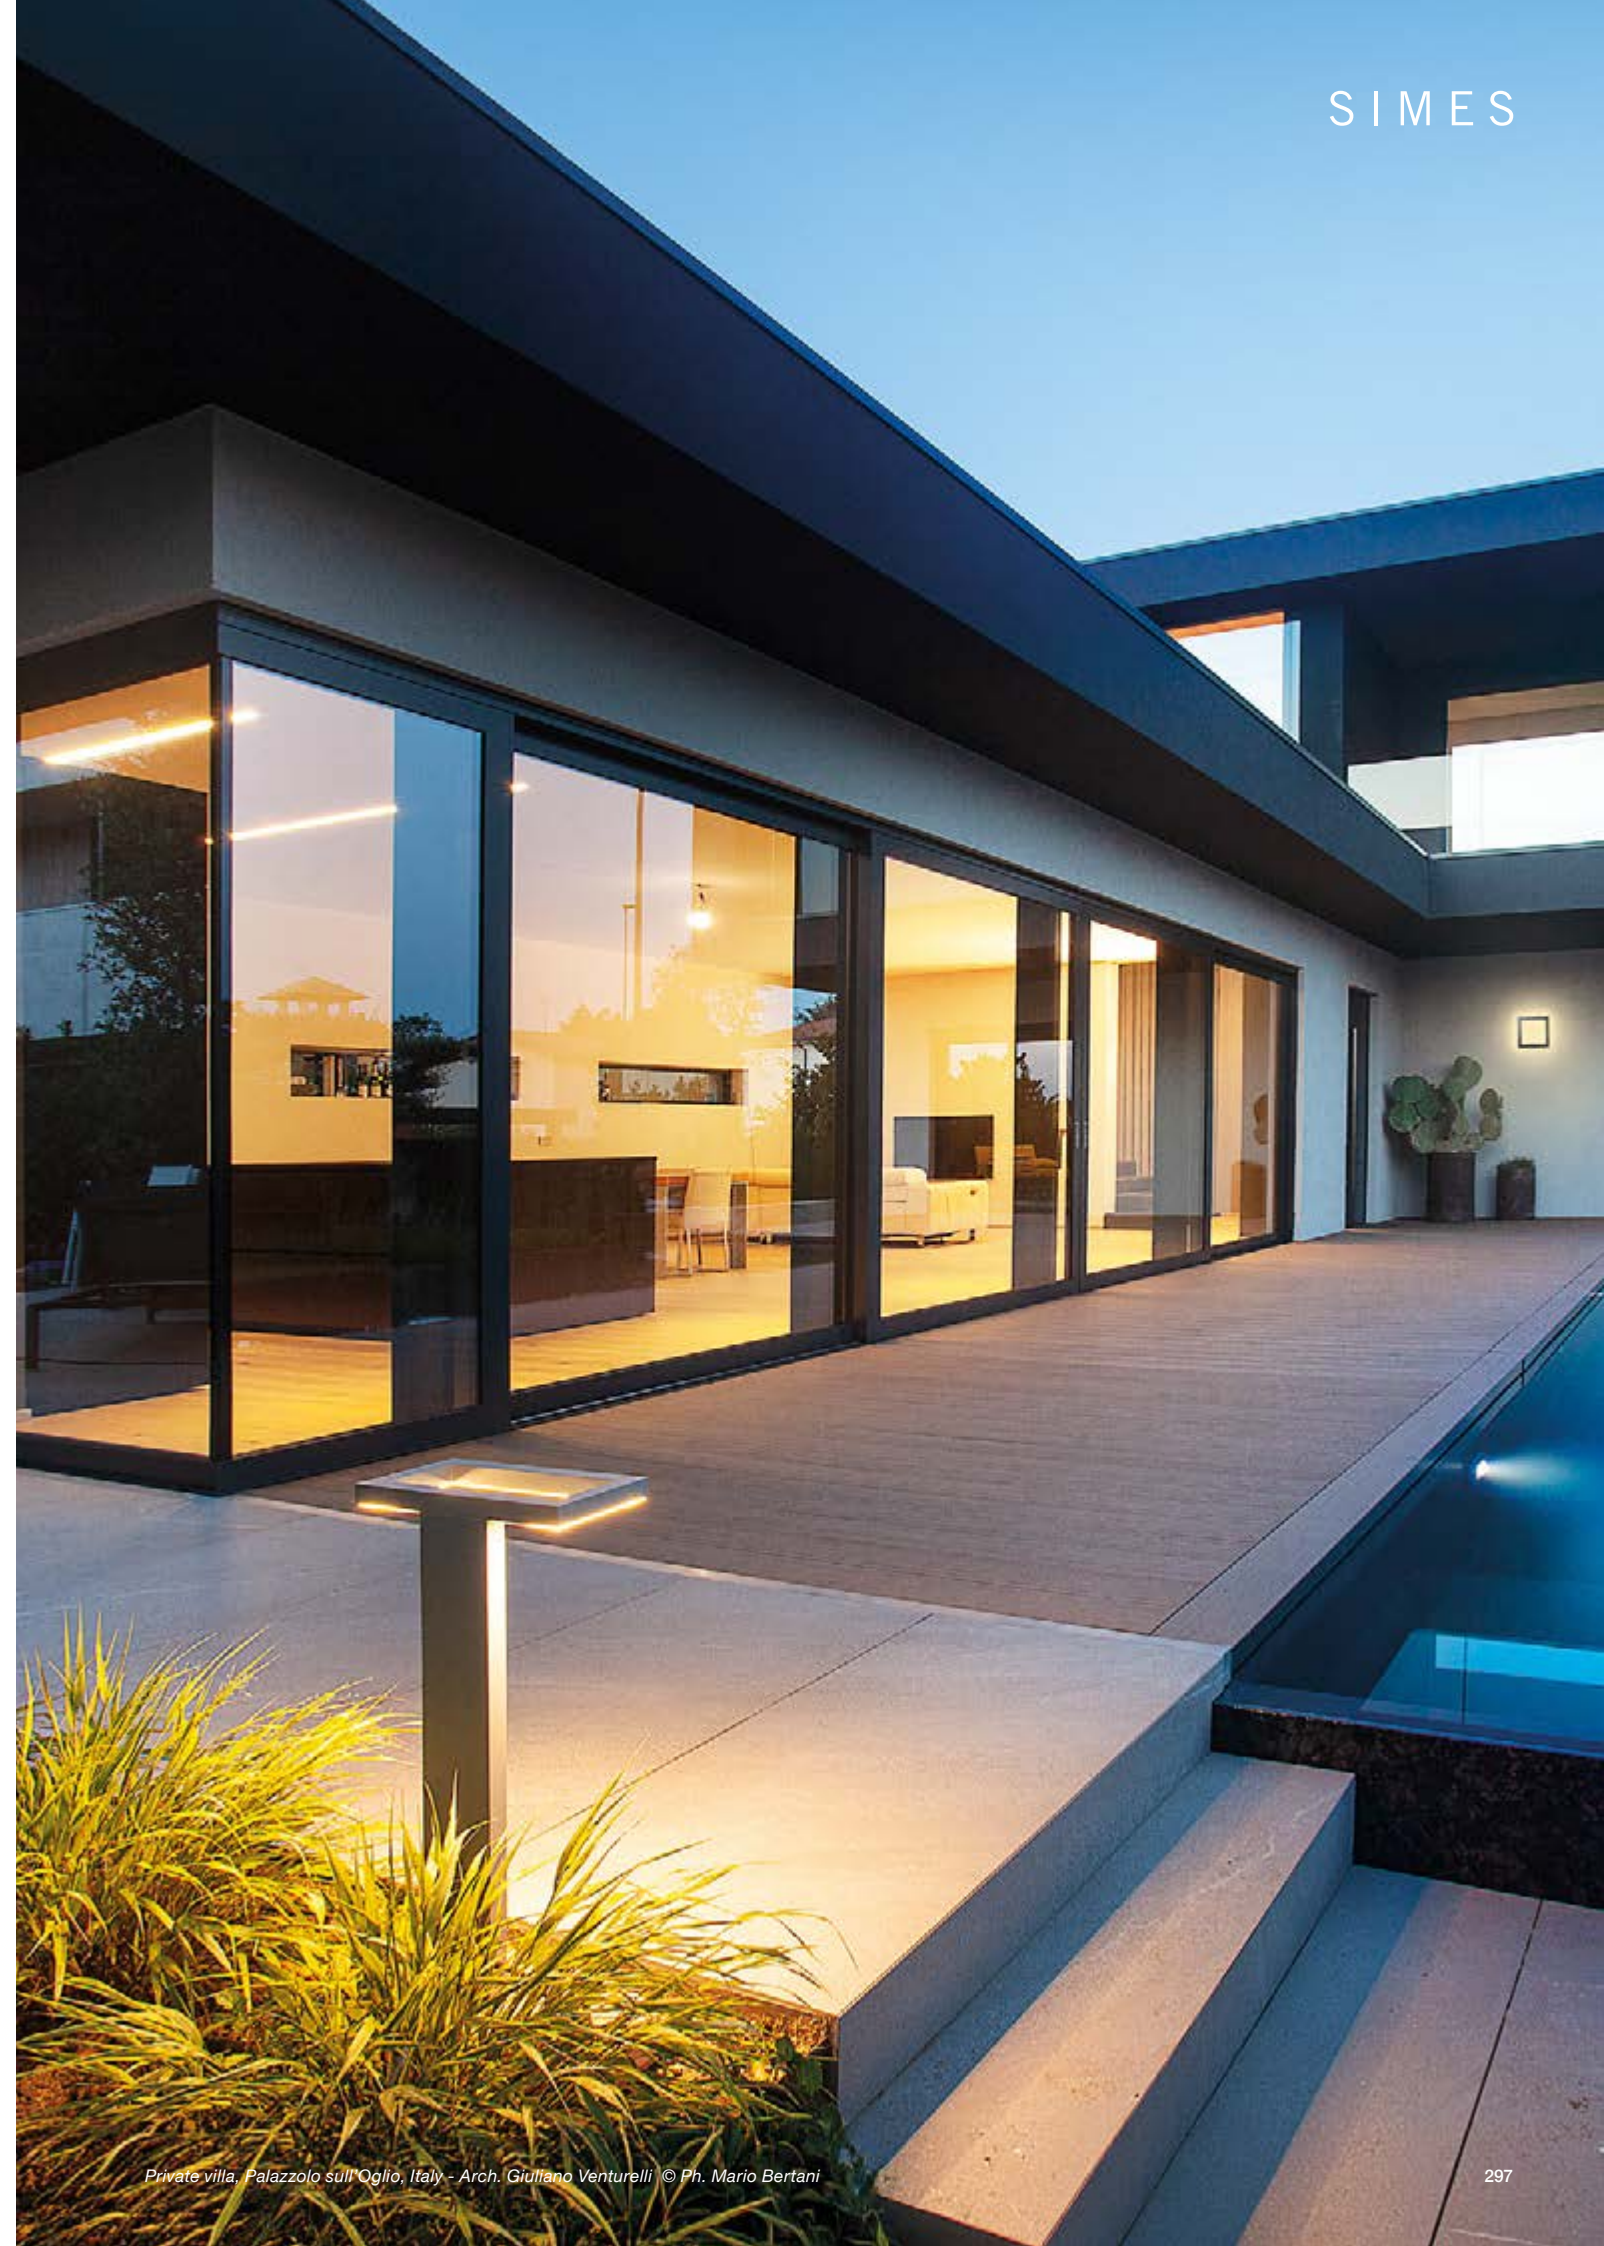




DESCRIZIONE TECNICA Technical description	INFORMAZIONI GENERALI General information		CODICI COLORE Colour codes
Struttura in alluminio pressofuso. Diffusore in vetro temprato acidato extrachiaro. Viti in acciaio con rivestimento anticorrosivo. Precablati con cavo. Die-cast aluminium housing. Extra-clear acid-etched toughened glass diffuser. Steel screws with anticorrosive coating. Pre-wired luminaire.	GRADO DI PROTEZIONE IP rating	IP54	.01 Bianco White .14 Grigio alluminio Aluminium Grey
	CLASSE DI ISOLAMENTO Insulation class	CLASS III ⚡	
	RESISTENZA IMPATTO Mechanical resistance	IK 06 IK 09 (Trim orizzontale e quadrata)	
			MODELLO REGISTRATO Registered design

PARETE

Wall mounted

TRIM ORIZZONTALE APPLIQUE L300


Trim horizontal applique L300



CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.3175H	2700 K		90	1444 lm	18 W	24 Vdc remote (p.554)	PWM
S.3175W	3000 K		90	1545 lm	18 W	24 Vdc remote (p.554)	PWM
S.3175N	4000 K		90	1612 lm	18 W	24 Vdc remote (p.554)	PWM

TRIM RETTANGOLARE APPLIQUE L300


Trim rectangular applique L300



CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.3176H	2700 K		90	1444 lm	18 W	24 Vdc remote (p.554)	PWM
S.3176W	3000 K		90	1545 lm	18 W	24 Vdc remote (p.554)	PWM
S.3176N	4000 K		90	1612 lm	18 W	24 Vdc remote (p.554)	PWM

TRIM QUADRATO APPLIQUE Ø 170


Trim square applique Ø 170



CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.3152H	2700 K		90	722 lm	9 W	24 Vdc remote (p.554)	PWM
S.3152W	3000 K		90	773 lm	9 W	24 Vdc remote (p.554)	PWM
S.3152N	4000 K		90	806 lm	9 W	24 Vdc remote (p.554)	PWM

TRIM QUADRATO APPLIQUE Ø 240


Trim square applique Ø 240



CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.3157H	2700 K		90	1444 lm	18 W	24 Vdc remote (p.554)	PWM
S.3157W	3000 K		90	1545 lm	18 W	24 Vdc remote (p.554)	PWM
S.3157N	4000 K		90	1612 lm	18 W	24 Vdc remote (p.554)	PWM

TRIM QUADRATO PALETTO H240


Trim square bollard H240



CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.3153H	2700 K		90	722 lm	9 W	24 Vdc remote (p.554)	PWM
S.3153W	3000 K		90	773 lm	9 W	24 Vdc remote (p.554)	PWM
S.3153N	4000 K		90	806 lm	9 W	24 Vdc remote (p.554)	PWM

TRIM QUADRATO PALETTO H580


Trim square bollard H580





CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.3158H	2700 K		90	1444 lm	18 W	24 Vdc remote (p.554)	PWM
S.3158W	3000 K		90	1545 lm	18 W	24 Vdc remote (p.554)	PWM
S.3158N	4000 K		90	1612 lm	18 W	24 Vdc remote (p.554)	PWM

TRIM RETTANGOLARE PALETTO H580

Trim rectangular bollard H580



CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.3177H	2700 K		90	1444 lm	18 W	24 Vdc remote (p.554)	PWM
S.3177W	3000 K		90	1545 lm	18 W	24 Vdc remote (p.554)	PWM
S.3177N	4000 K		90	1612 lm	18 W	24 Vdc remote (p.554)	PWM



ACCESSORI PER TUTTE LE VERSIONI DI TRIM PALETTO Accessories for all Trim bollard versions

S.3159 Flangia da interrare per Trim paletto Flange to be buried for Trim bollard