





Design K.Begasse

# Movit

## Adjustable projector

MOVIT is a new extraordinary LED projector for ground or wall installation. It can be used as direct or indirect light and it's also available with arm. MOVIT has elegant proportions and a smaller visual impact than traditional projectors, easy to install and available with asymmetric and symmetric reflector. It covers a wide range of applications and gives to all designers a high flexibility of use.



[www.simes.it/movit](http://www.simes.it/movit)



## MOVIT Adjustable projector

Die-cast EN AB-47100 aluminium housing and extruded EN AW-6060 aluminium structure (arm version) with high corrosion resistance.  
 Stainless steel screws.  
 Clear toughened glass diffuser.  
 HI-GRADE aluminium reflectors.  
 Luminaire supplied with 1,5m of cable (Movit Rectangular/Square 220mm).  
 Pre-wired luminaire with neoprene cable and connector in the base (Movit Square 320mm).  
 Silicone gaskets.  
**Double powder paint.**

**Protection class**  
 IP65

**Isolation class**  
 CLASS I ⊕

**Mechanical resistance**  
 IK 09  
 IK 10 SQUARE 320 mm



**S.3049**  
**ACCESSORY STAKE FOR MOVIT SQUARE 220 mm and MOVIT RECTANGULAR 130mm**  
 In polypropylene  
 Colour: black (code .09)



**S.3079**  
**ACCESSORY STAKE FOR MOVIT SQUARE 320 mm**  
 In polypropylene  
 Colour: black (code .09)


### Colours:

- White (code 01)
- Aluminium grey (code 14)

*For the latest technical information and luminaire updates with LED technology please refer to [www.simes.it](http://www.simes.it)*

**REGISTERED DESIGN**



## Rectangular symmetric optic




**S.3005W** MID-POWER LEDs **3000K** CRI90 890lm  
Rated luminaire luminous flux 699lm

**S.3005N** MID-POWER LEDs **4000K** CRI90 900lm  
Rated luminaire luminous flux 707lm

Rated input power 9W  
220V-240V AC 50/60Hz / DC Not Dimmable





## Rectangular asymmetric optic




**S.3000W** MID-POWER LEDs **3000K** CRI90 890lm  
Rated luminaire luminous flux 608lm

**S.3000N** MID-POWER LEDs **4000K** CRI90 900lm  
Rated luminaire luminous flux 626lm

Rated input power 9W  
220V-240V AC 50/60Hz / DC Not Dimmable





## Rectangular with arm




**S.3010W** MID-POWER LEDs **3000K** CRI90 890lm  
Rated luminaire luminous flux 699lm

**S.3010N** MID-POWER LEDs **4000K** CRI90 900lm  
Rated luminaire luminous flux 707lm

Rated input power 9W  
220V-240V AC 50/60Hz / DC Not Dimmable





## Square 220 mm symmetric optic




**S.3055W**   
MID-POWER LEDs **3000K** CRI90 2185lm  
Rated luminaire luminous flux 1505lm

**S.3055N**   
MID-POWER LEDs **4000K** CRI90 2207lm  
Rated luminaire luminous flux 1561lm

Rated input power 20W  
220V-240V AC 50/60Hz / DC Not Dimmable





## Square 220 mm asymmetric optic




**S.3050W**   
MID-POWER LEDs **3000K** CRI90 2185lm  
Rated luminaire luminous flux 1595lm

**S.3050N**   
MID-POWER LEDs **4000K** CRI90 2207lm  
Rated luminaire luminous flux 1611lm

Rated input power 20W  
220V-240V AC 50/60Hz / DC Not Dimmable





## Square 220 mm with arm




**S.3060W**   
MID-POWER LEDs **3000K** CRI90 2185lm  
Rated luminaire luminous flux 1505lm

**S.3060N**   
MID-POWER LEDs **4000K** CRI90 2207lm  
Rated luminaire luminous flux 1561lm

Rated input power 20W  
220V-240V AC 50/60Hz / DC Not Dimmable

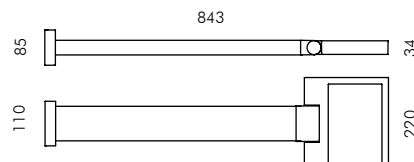

Square 320 mm symmetric optic





**S.3075W**   
 MID-POWER LEDs **3000K** CRI90 4573lm  
 Rated luminaire luminous flux 3915lm

**S.3075N**   
 MID-POWER LEDs **4000K** CRI90 4618lm  
 Rated luminaire luminous flux 4004lm


Rated input power 42W  
 220V-240V AC 50/60Hz / DC Not Dimmable

h(m)	E(lx) 3000K			
10	4.0	4.0	3.5	2.5
8	9.0	8.0	5.5	3.5
6	18	14	9.0	4.0
4	37	25	10	4.0
2	42	20	5	1.5


3 m  0 2 4 6 (m)



Square 320 mm asymmetric optic





**S.3070W**   
 MID-POWER LEDs **3000K** CRI90 4573lm  
 Rated luminaire luminous flux 2795lm

**S.3070N**   
 MID-POWER LEDs **4000K** CRI90 4618lm  
 Rated luminaire luminous flux 2935lm



Rated input power 42W  
 220V-240V AC 50/60Hz / DC Not Dimmable

h(m)	E(lx) 3000K			
10	3.5	3.5	2.5	2.0
8	7.0	6.0	4.5	3.0
6	15	12	7.0	4.5
4	31	22	12	6.5
2	61	37	11	4.0


3 m  0 2 4 6 (m)




MOVIT RECTANGULAR, MOVIT SQUARE 220 mm and MOVIT SQUARE 320 mm can be installed on the pole using the fixation accessory.

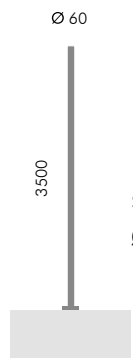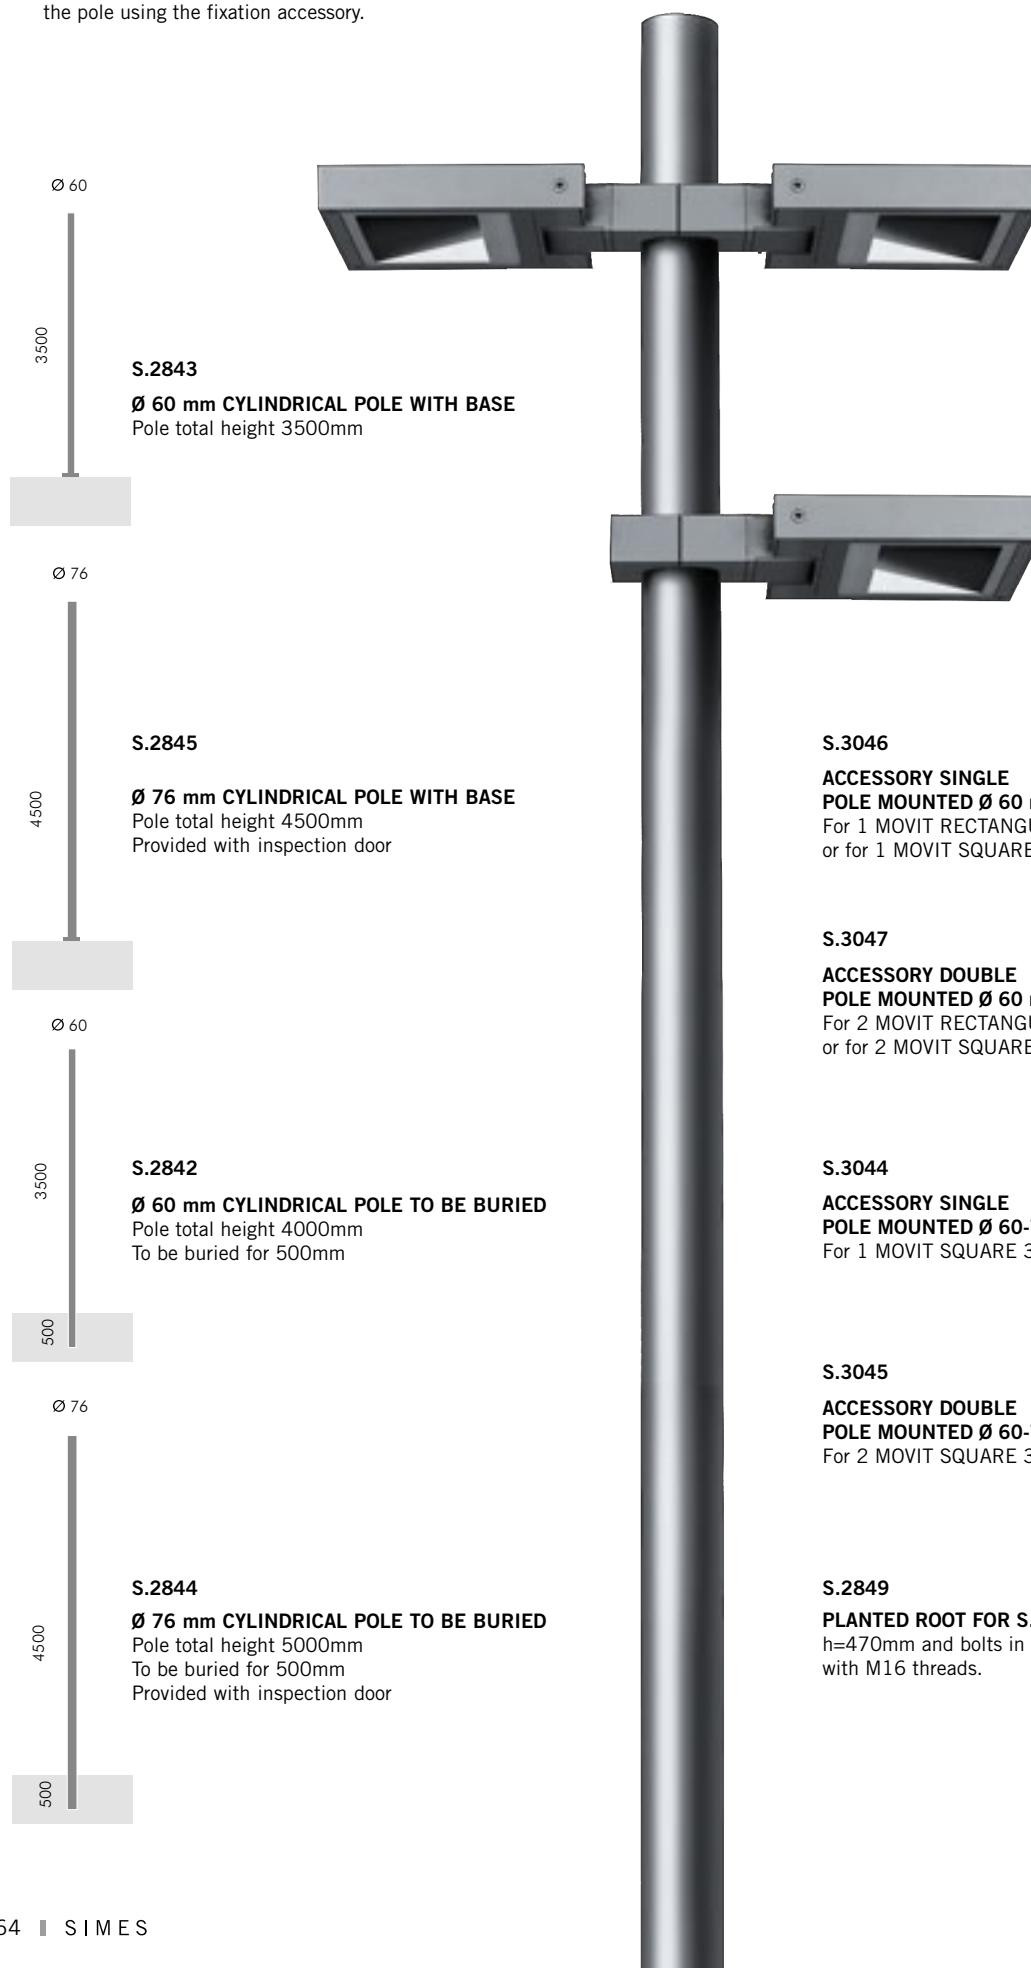


**S.2843**  
**Ø 60 mm CYLINDRICAL POLE WITH BASE**  
 Pole total height 3500mm

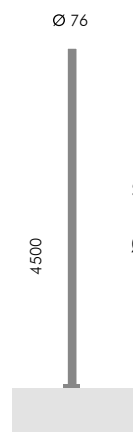

**S.2845**  
**Ø 76 mm CYLINDRICAL POLE WITH BASE**  
 Pole total height 4500mm  
 Provided with inspection door

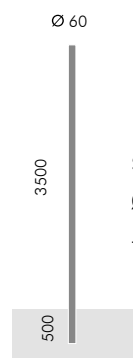


**S.2842**  
**Ø 60 mm CYLINDRICAL POLE TO BE BURIED**  
 Pole total height 4000mm  
 To be buried for 500mm

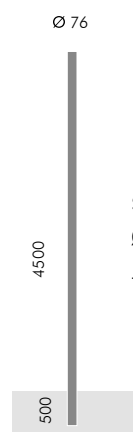


**S.2844**  
**Ø 76 mm CYLINDRICAL POLE TO BE BURIED**  
 Pole total height 5000mm  
 To be buried for 500mm  
 Provided with inspection door


**S.3046**  
**ACCESSORY SINGLE**  
**POLE MOUNTED Ø 60 mm**  
 For 1 MOVIT RECTANGULAR 130mm  
 or for 1 MOVIT SQUARE 220mm




**S.3047**  
**ACCESSORY DOUBLE**  
**POLE MOUNTED Ø 60 mm**  
 For 2 MOVIT RECTANGULAR 130mm  
 or for 2 MOVIT SQUARE 220mm



**S.3044**  
**ACCESSORY SINGLE**  
**POLE MOUNTED Ø 60-76 mm**  
 For 1 MOVIT SQUARE 320mm



**S.3045**  
**ACCESSORY DOUBLE**  
**POLE MOUNTED Ø 60-76 mm**  
 For 2 MOVIT SQUARE 320mm



**S.2849**  
**PLANTED ROOT FOR S.2843 / S.2845**  
 h=470mm and bolts in galvanized steel  
 with M16 threads.

