




Yas Mall, Yas Island, Abu Dhabi, UAE © Cinmar Lighting Systems

Stelo

Urban lighting

Available with LED neutral white, STELO is an elegant tall bollard specifically suitable for pedestrian areas, town centres and parks. Its beam assures glare-free illumination and maximizes the interdistance between each bollard.





Public place, Piazza Aldo Moro, Mola di Bari, Italy - Architects Michele Sgobba and Imma Resta © Agenzia Italamona, ph. Angelo Stanisci


STELO Urban lighting

Extruded EN AW-6060 aluminium profile, Die-cast EN AB-47100 aluminium housing with high corrosion resistance.
 Transparent polycarbonate diffuser (opal diffuser on request).
 Stainless steel screws.
 Luminaire suitable for double cable glands and connection box with fuses.
 Inspection door perfectly flush with the pole surface.
 Silicone gaskets.
Double powder paint.

Colours:

- Aluminium grey (code 14)
- Anthracite grey (code 24)

Protection class
IP65

Isolation class
CLASS II 

Mechanical resistance of glass
IK 10

Leds 3000K CRI90 versions are available on request.
 Integral ballast to allow an automatic power and flux reduction without the need of any external control systems available on request with surcharge.

For the latest technical information and luminaire updates with LED technology please refer to www.simes.it

REGISTERED DESIGN



S.4129

FLANGE ACCESSORY
 Ø 195mm h 800mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.



S.4128


FIXING BASE
 Base 300x300mm
 Spacing 200x200mm
 Holes for M16



S.2499


SURGE PROTECTION DEVICE 10kV
 Surge protection devices are utilised to limit the damage of such electrical disturbances (temporary, transitional or permanent). Each fixture must be connected to one single device at a distance of no more than 10m away.

Transparent polycarbonate diffuser




S.4120N 

1 COB LED **4000K** CRI90 6060lm
 Rated luminaire luminous flux 4010lm
 Rated input power 56W
 220V-240V AC 50/60Hz / DC Not Dimmable

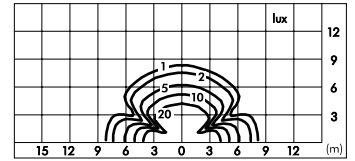

Ø 200



3500

Version with opal polycarbonate
 diffuser on demand.
NOTE: the light distribution will
 be modified