






Zen

Ceiling and wall bulkhead

Elegant and minimal, with clean design and small size, ZEN has a technological core with LED sources perfectly distributed.

The IP65 protection and the possibility to integrate protecting grids, lets ZEN become part of any architectural scheme both external and internal.





Casa Y, Pino Torinese, Torino, Italy © Arch. Luca Maria Gandini ph. Mario Bertani

ZEN Ceiling and wall bulkhead

Die cast EN AB-47100 aluminium housing with high corrosion resistance. Fixing base with heat dissipation system.
 Acid-etched glass diffuser 5mm thick, white painted internally.
 Stainless steel screws.
 Luminaire with double cable entry and grommet (Luminaire suitable for double grommets).
 Silicone gaskets.
 Zen Round 320 and Square 300 supplied with emergency inverter and battery to supply 1 hour emergency lighting in the case of a mains failure.
Double powder paint.

Colours:

- White (code 01)
- Aluminium grey (code 14)

Protection class
 IP65

Isolation class
 CLASS I ⊕


Mechanical resistance
 IK 06
 (IK 09 on request only for ROUND VERSION 240)



Leds 4000K CRI90 versions are available on request.

For the latest technical information and luminaire updates with LED technology please refer to www.simes.it

REGISTERED DESIGN



ZEN ROUND 320mm and SQUARE 300mm


is available in 1 hour emergency version (3 hour emergency version available on request).
 Complies with CEI EN 60598-2-22.

Round


**S.6950W** 

MID-POWER LEDs **3000K** CRI90 1089lm
 Rated luminaire luminous flux 538lm
 Rated input power 10,5W
 220V-240V AC 50/60Hz / DC Not Dimmable

Round 320 mm

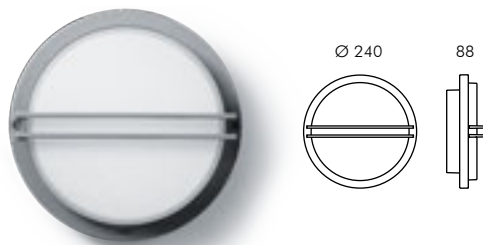

**S.6980W** 

MID-POWER LEDs **3000K** CRI90 1950lm
 Rated luminaire luminous flux 1086lm
 Rated input power 22W
 220V-240V AC 50/60Hz / DC Not Dimmable

S.6981W 

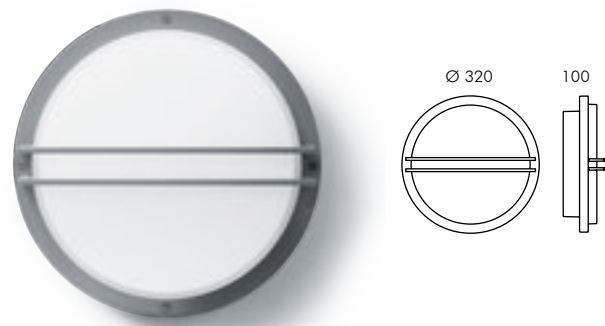

Emergency version
 Complies with CEI EN 60598-2-22
 MID-POWER LEDs **3000K** CRI90 1950lm
 Rated luminaire luminous flux 1086lm
 Rated input power 22W
 220V-240V AC 50/60Hz / DC Not Dimmable

Round with grill

**S.6955W** 

MID-POWER LEDs **3000K** CRI90 1089lm
 Rated luminaire luminous flux 428lm
 Rated input power 10,5W
 220V-240V AC 50/60Hz / DC Not Dimmable

Round 320 mm with grill

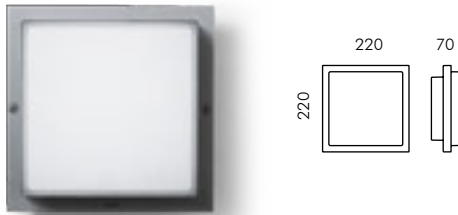

**S.6985W** 

MID-POWER LEDs **3000K** CRI90 1950lm
 Rated luminaire luminous flux 984lm
 Rated input power 22W
 220V-240V AC 50/60Hz / DC Not Dimmable

S.6986W 

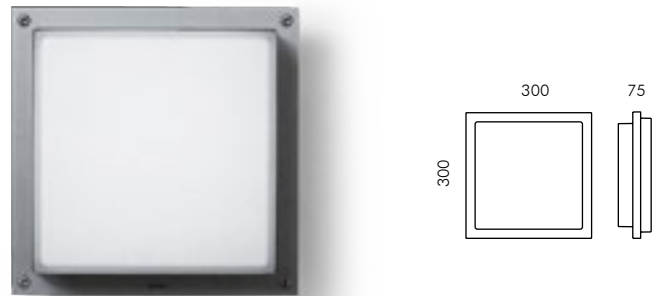

Emergency version
 Complies with CEI EN 60598-2-22
 MID-POWER LEDs **3000K** CRI90 1950lm
 Rated luminaire luminous flux 984lm
 Rated input power 22W
 220V-240V AC 50/60Hz / DC Not Dimmable

Square


**S.6960W** 

MID-POWER LEDs **3000K** CRI90 1089lm
 Rated luminaire luminous flux 497lm
 Rated input power 10,3W
 220V-240V AC 50/60Hz / DC Not Dimmable

Square 300 mm

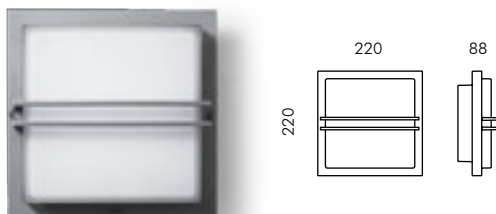

**S.6990W** 

MID-POWER LEDs **3000K** CRI90 1950lm
 Rated luminaire luminous flux 1086lm
 Rated input power 22W
 220V-240V AC 50/60Hz / DC Not Dimmable

S.6991W 

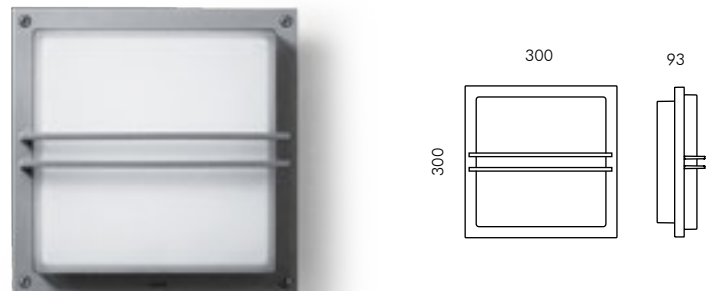

Emergency version
 Complies with CEI EN 60598-2-22
 MID-POWER LEDs **3000K** CRI90 1950lm
 Rated luminaire luminous flux 1086lm
 Rated input power 22W
 220V-240V AC 50/60Hz / DC Not Dimmable

Square with grill

**S.6965W** 

MID-POWER LEDs **3000K** CRI90 1089lm
 Rated luminaire luminous flux 446lm
 Rated input power 10,3W
 220V-240V AC 50/60Hz / DC Not Dimmable

Square 300 mm with grill

**S.6995W** 

MID-POWER LEDs **3000K** CRI90 1950lm
 Rated luminaire luminous flux 984lm
 Rated input power 22W
 220V-240V AC 50/60Hz / DC Not Dimmable

S.6996W 

Emergency version
 Complies with CEI EN 60598-2-22
 MID-POWER LEDs **3000K** CRI90 1950lm
 Rated luminaire luminous flux 984lm
 Rated input power 22W
 220V-240V AC 50/60Hz / DC Not Dimmable

