



ACCESSORI BLITZ



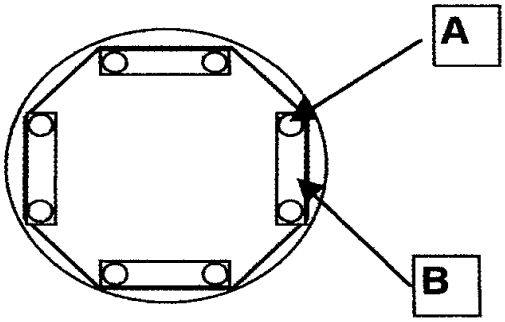





ACCESSORI BLITZ	LENTE CONCENTRANTE	**Art. S.4039**
	LENTE DIFFONDENTE	**Art. S.4040**
	LENTE CONCENTRANTE DICROICA ROSSA	**Art. S.4056**
	LENTE CONCENTRANTE DICROICA BLU	**Art. S.4057**
	LENTE CONCENTRANTE DICROICA GIALLA	**Art. S.4058**
	LENTE CONCENTRANTE DICROICA VERDE	**Art. S.4059**
	LENTE DIFFONDENTE DICROICA ROSSA	**Art. S.4071**
	LENTE DIFFONDENTE DICROICA BLU	**Art. S.4072**
	LENTE DIFFONDENTE DICROICA GIALLA	**Art. S.4073**
	LENTE DIFFONDENTE DICROICA VERDE	**Art. S.4074**
	LENTE DIFFONDENTE DICROICA ROSSA	**Art. S.4076**
	LENTE DIFFONDENTE DICROICA BLU	**Art. S.4077**
	LENTE DIFFONDENTE DICROICA GIALLA	**Art. S.4078**
	LENTE DIFFONDENTE DICROICA VERDE	**Art. S.4079**

CARATTERISTICHE TECNICHE

In vetro temprato
Con guarnizione in silicone

ISTRUZIONI DI MONTAGGIO

Aprire l'apparecchio rimuovendo la calotta
Rimuovere il telaio portalente (**B**) svitando le viti (**A**)
Togliere la lente originale dal telaio (**C**)
Inserire nel telaio la lente fornita tenendo la parte convessa all'esterno (**D**)
Reinstallare il telaio (**B**) nella sua sede con le viti (**A**)
Ripetere l'operazione per ogni lente da sostituire
Richiudere l'apparecchio


AVVERTENZE

Togliere tensione prima di effettuare manutenzioni
In caso di rottura sostituire il diffusore prima di riutilizzare l'apparecchio

Il rispetto di queste norme è molto importante per l'efficienza dell'apparecchio
e per la sicurezza delle persone, pertanto esse vanno conservate

SIMES
luci per l'architettura

BLITZ ACCESSORY

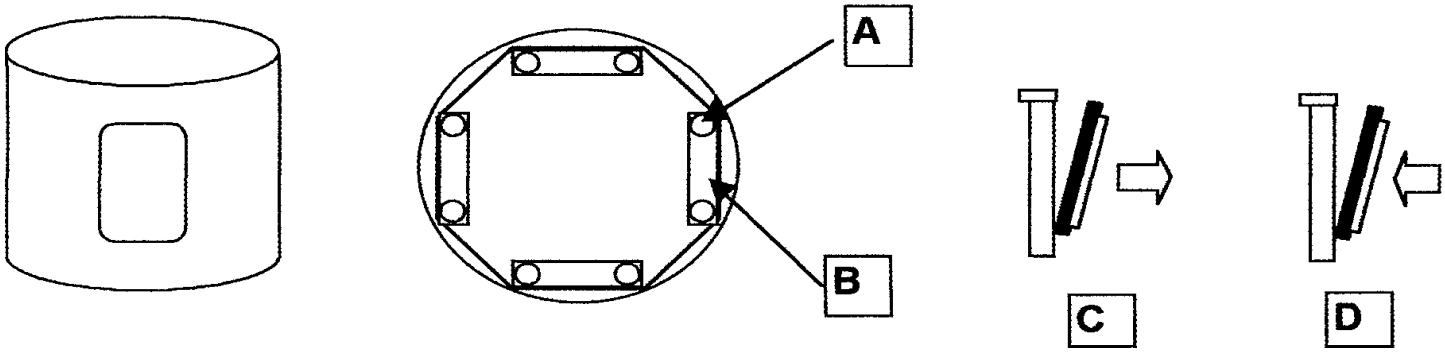

BLITZ ACCESSORY	INTENSIVE LENS	**Art. S.4039**
	EXTENSIVE LENS	**Art. S.4040**
	INTENSIVE DICHROIC LENS RED	**Art. S.4056**
	INTENSIVE DICHROIC LENS BLUE	**Art. S.4057**
	INTENSIVE DICHROIC LENS YELLOW	**Art. S.4058**
	INTENSIVE DICHROIC LENS GREEN	**Art. S.4059**
	EXTENSIVE DICHROIC LENS RED	**Art. S.4071**
	EXTENSIVE DICHROIC LENS BLUE	**Art. S.4072**
	EXTENSIVE DICHROIC LENS YELLOW	**Art. S.4073**
	EXTENSIVE DICHROIC LENS GREEN	**Art. S.4074**
	EXTENSIVE DICHROIC LENS RED	**Art. S.4076**
	EXTENSIVE DICHROIC LENS BLUE	**Art. S.4077**
	EXTENSIVE DICHROIC LENS YELLOW	**Art. S.4078**
	EXTENSIVE DICHROIC LENS GREEN	**Art. S.4079**

TECHNICAL INFORMATIONS:

Tempered glass diffuser
Silicon gasket

INSTALLATION INSTRUCTIONS:

Open the fitting and remove the cover
Remove the glass-holder (**B**) unscrewing the screws (**A**)
Remove the standard lens from from glass-holder (**C**)
Install the accessory lens on the glass-holder (the round part must be externally) (**D**)
Re-install the glass-holder (**B**) in its position with the screws (**A**)
Repeat the operations for each lens that must be replaced
Close the fitting

RECOMMENDATIONS:

Disconnect the power before maintenance
In case of glass damage, replace it before using the fitting

Is very important to follow these instructions to, enable the fitting to be installed correctly. Please retain for information.

SIMES
architectural lighting