TECHNICAL DATA SHEET

S.3913W **MICROSLOT UP-DOWN**

luce per l'architettura

-PRODUCT TYPE

Wall mounted luminaire . IP rating IP 65

-MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 and extruded EN AW-6060 with high resistance against corrosion.

Stone wash surface treatment prior to painting process.

A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion.

Silicone gaskets.

Painting Process:

3 Step Process

- 1) Surface treatment with BONDERITE . A heavy metal free chemical surface treatment containing ceramic nano particles giving a cohesive, inorganic and highly dense protective coating.
- 2) PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content.
- 3) POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Improved protection for Marine applications.

Mechanical resistance of glass IK 08

-LIGHTING PERFORMANCE

Reflector in 99.98% pure aluminium . Clear toughened glass 6 mm thick. LOR --

-WIRING

Single cable entry (Ø 8 ÷ 12 mm).


Isolation: CLASS I.

Available colours: ALUMINIUM GREY (cod.14), ANTHRACITE GREY (cod.24).

Weight: 2.12 Kg Glow Wire test: 960°C


Class 2 L.E.D circuit included. (CEI EN 60825-1:2003-02)





* Photometric measured using COLD WHITE LED 6650K



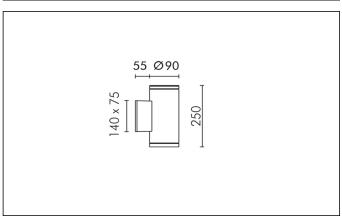



LAST UPDATE 14/09/2010

SIMES S.p.A. Via G.Pastore 2/4 25040 - Corte Franca - BRESCIA (ITALY) http://www.simes.com - e-mail: simes@simes.com

Export Sales: Technical Dep.

Lighting Design Dep.:

+39 0309860440 +39 0309860450 Export Sales: Technical Dep.:

+39 0309860449 +39 0309860459 Lighting Design Dep.: +39 0309860429




TECHNICAL DATA SHEET

S.3913W FURTHER INFORMATION

SIMES

FIXING BASE

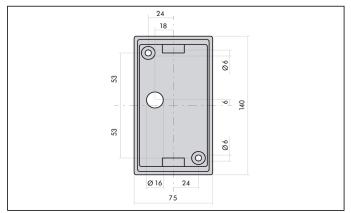

LAST UPDATE 14/09/2010