

# TECHNICAL DATA SHEET

## S.6070 MINIBLINKER

SIMES  
luce per l'architettura

### -PRODUCT TYPE

Wall mounted luminaire .  
IP rating IP 65

### -MATERIAL CHARACTERISTICS

Aluminium die cast housing in EN AB-47100 with high resistance against corrosion.

Stone wash surface treatment prior to painting process.

A4 grade Stainless Steel screws with 2,5-3% molybdenum content which increases the resistance against corrosion.

Silicone gaskets.

Painting Process :

3 Step Process

1) Surface treatment with BONDERITE . A heavy metal free chemical surface treatment containing ceramic nano particles giving a cohesive, inorganic and highly dense protective coating .

2) PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content.

3) POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions.

Improved protection for Marine applications.

Mechanical resistance of glass IK 06

### -LIGHTING PERFORMANCE

Reflector in 99.98% pure aluminium .

Acid-etched toughened glass 4 mm thick.

LOR --

### -INSTALLATION AND MAINTENANCE

The recessing box is provided with support ribs that make it crush-proof during installation; the ribs are molded to the recessing box and cannot fall out before installation. The ribs must be removed before the installation of the luminaire.

The lamp body is secured to the recessing box through stainless steel screws; the electric components are protected by a covering reflector that houses the light source.

### -WIRING

Single cable entry .




Isolation: CLASS I .

Available colours: ALUMINIUM GREY (cod.14), RUSTY CORTEN (cod.18).

Weight: 1.6 Kg

Glow Wire test: --

Class 2 L.E.D circuit included. (CEI EN 60825-1:2003-02)




\* Photometric measured using COLD WHITE LED 6650K

4 ACCENT LED 6100K 10W 230V  
Electronic transformer 100/240V 50÷60Hz



IP 65

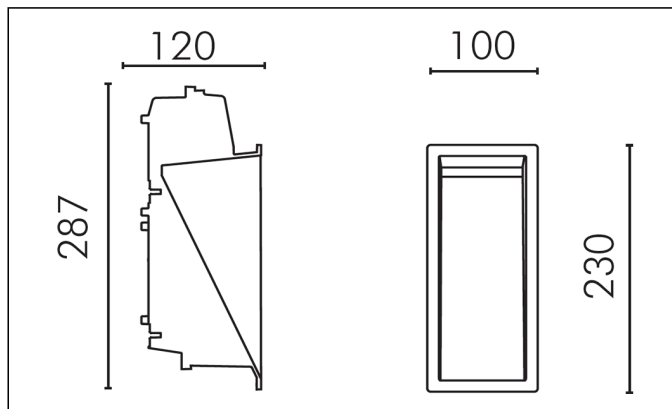

LAST UPDATE 13/09/2010

SIMES S.p.A.  
Via G.Pastore 2/4  
25040 - Corte Franca - BRESCIA (ITALY)  
<http://www.simes.com> - e-mail: [simes@simes.com](mailto:simes@simes.com)

Tel:  
Export Sales: +39 0309860440  
Technical Dep.: +39 0309860450  
Lighting Design Dep.: +39 0309860425

Fax:  
Export Sales: +39 0309860449  
Technical Dep.: +39 0309860459  
Lighting Design Dep.: +39 0309860429



The present technical data sheet and all the information contained is property of SIMES S.p.A. All rights reserved.  
We reserve the right to change specifications without prior written notice.

# TECHNICAL DATA SHEET

## S.6070

### ACCESSORIES FOR MINIBLINKER

SIMES  
luce per l'architettura



**S.6073**

**RECESSING BOX for MINIBLINKER**

110 x 300 mm

Depth 130 mm

LAST UPDATE 13/09/2010

SIMES S.p.A.  
Via G.Pastore 2/4  
25040 - Corte Franca - BRESCIA (ITALY)  
<http://www.simes.com> - e-mail: [simes@simes.com](mailto:simes@simes.com)

Tel:  
Export Sales: +39 0309860440  
Technical Dep. +39 0309860450  
Lighting Design Dep.: +39 0309860425

Fax:  
Export Sales: +39 0309860449  
Technical Dep.: +39 0309860459  
Lighting Design Dep.: +39 0309860429



The present technical data sheet and all the information contained is property of SIMES S.p.A. All rights reserved.  
We reserve the right to change specifications without prior written notice.