

PARETE Wall mounted



L.220 H.33 D.80



L.290 H.43 D.105

PALETTO Bollard



L.125 H.220 / H.450 D.66



L.220 H.220 / H.580 D.66



L.290 H.290 / H.580 / H.870 D.85





DESCRIZIONE TECNICA Technical description	INFORMAZIONI GENERALI General information		CODICI COLORE Colour codes	
Struttura in alluminio pressofuso. Paletti in alluminio estruso. Diffusore in vetro temprato acidato extrachiaro. Viti in acciaio con rivestimento anticorrosivo. Precabato con cavo per Minilook Applique 220 e Paletti. Entrata cavo singola per Look Applique 290. Die-cast aluminium housing. Bollards in extruded aluminium. Extra-clear acid-etched toughened glass diffuser. Steel screws with anticorrosive coating. Pre-wired Minilook applique 220 and Bollards. Single cable entry for Look applique 290.	GRADO DI PROTEZIONE IP rating	IP65	.01 Bianco White .14 Grigio alluminio Aluminium Grey .20 Bronzo brunito Burnished Bronze .24 Grigio antracite Anthracite Grey	
	CLASSE DI ISOLAMENTO Insulation class	CLASS I ⚡ (Look applique 290)		
		CLASS II ⚡		
		CLASS III ⚡ (Microlook)		
	RESISTENZA IMPATTO Mechanical resistance	IK 05 (Look applique 290)		MODELLO REGISTRATO Registered design
IK 06 (Minilook 220, Look paletto 290)				

PALETTO L125

Bollard L125

MICROLOOK PALETTO H220


Microlook bollard H220

CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7216H	2700 K	Singola emissione Single emission		90	367 lm	3.6 W	24 Vdc remote (p.554)	PWM
S.7216W	3000 K			90	377 lm	3.6 W	24 Vdc remote (p.554)	PWM
S.7216N	4000 K			90	391 lm	3.6 W	24 Vdc remote (p.554)	PWM

MICROLOOK PALETTO H450

Microlook bollard H450

CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7217H	2700 K	Singola emissione Single emission		90	367 lm	3.6 W	24 Vdc remote (p.554)	PWM
S.7217W	3000 K			90	377 lm	3.6 W	24 Vdc remote (p.554)	PWM
S.7217N	4000 K			90	391 lm	3.6 W	24 Vdc remote (p.554)	PWM



ACCESSORI PER TUTTE LE VERSIONI DI MICROLOOK PALETTO


Accessories for all Microlook bollard versions

S.7219 Flangia da interrare per Microlook paletto Flange to be buried for Microlook bollard

PARETE L220

Wall mounted L220

MINILOOK APPLIQUE L220



CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7201H	2700 K	Singola emissione Single emission		90	798 lm	8.8 W	220-240 Vac	Dali2/Push
S.7201W	3000 K			90	820 lm	8.8 W	220-240 Vac	Dali2/Push
S.7201N	4000 K			90	851 lm	8.8 W	220-240 Vac	Dali2/Push
S.7202H	2700 K	Doppia emissione Double emission		90	842 lm	8.8 W	220-240 Vac	Dali2/Push
S.7202W	3000 K			90	866 lm	8.8 W	220-240 Vac	Dali2/Push
S.7202N	4000 K			90	898 lm	8.8 W	220-240 Vac	Dali2/Push

PALETTO L220

Bollard L220

MINILOOK PALETTO H220


Minilook bollard H220

CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7206H	2700 K	Singola emissione Single emission		90	798 lm	8.6 W	220-240 Vac	Dali2/Push
S.7206W	3000 K			90	820 lm	8.6 W	220-240 Vac	Dali2/Push
S.7206N	4000 K			90	851 lm	8.6 W	220-240 Vac	Dali2/Push
S.7215H	2700 K	Doppia emissione Double emission		90	1595 lm	15.0 W	220-240 Vac	Dali2/Push
S.7215W	3000 K			90	1640 lm	15.0 W	220-240 Vac	Dali2/Push
S.7215N	4000 K			90	1701 lm	15.0 W	220-240 Vac	Dali2/Push

MINILOOK PALETTO H580

Minilook bollard H580

CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7211H	2700 K	Singola emissione Single emission		90	798 lm	8.6 W	220-240 Vac	Dali2/Push
S.7211W	3000 K			90	820 lm	8.6 W	220-240 Vac	Dali2/Push
S.7211N	4000 K			90	851 lm	8.6 W	220-240 Vac	Dali2/Push
S.7220H	2700 K	Doppia emissione Double emission		90	1595 lm	15.0 W	220-240 Vac	Dali2/Push
S.7220W	3000 K			90	1640 lm	15.0 W	220-240 Vac	Dali2/Push
S.7220N	4000 K			90	1701 lm	15.0 W	220-240 Vac	Dali2/Push



ACCESSORI PER TUTTE LE VERSIONI DI MINILOOK PALETTO


Accessories for all Minilook bollard versions

S.7249 Flangia da interrare per Minilook paletto Flange to be buried for Minilook bollard



PARETE L290
Wall mounted L290


LOOK APPLIQUE L290



CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7250H	2700 K	Singola emissione Single emission		90	1081 lm	11.3 W	220-240 Vac	Dali2/Push
S.7250W	3000 K			90	1111 lm	11.3 W	220-240 Vac	Dali2/Push
S.7250N	4000 K			90	1153 lm	11.3 W	220-240 Vac	Dali2/Push
S.7252H	2700 K	Doppia emissione Double emission		90	1091 lm	11.3 W	220-240 Vac	Dali2/Push
S.7252W	3000 K			90	1122 lm	11.3 W	220-240 Vac	Dali2/Push
S.7252N	4000 K			90	1164 lm	11.3 W	220-240 Vac	Dali2/Push


PALETTO L290
Bollard L290

LOOK PALETTO H290
Look bollard H290




CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7260H	2700 K	Singola emissione Single emission		90	1081 lm	11.5 W	220-240 Vac	Dali2/Push
S.7260W	3000 K			90	1111 lm	11.5 W	220-240 Vac	Dali2/Push
S.7260N	4000 K			90	1153 lm	11.5 W	220-240 Vac	Dali2/Push
S.7265H	2700 K	Doppia emissione Double emission		90	2162 lm	22.0 W	220-240 Vac	Dali2/Push
S.7265W	3000 K			90	2222 lm	22.0 W	220-240 Vac	Dali2/Push
S.7265N	4000 K			90	2306 lm	22.0 W	220-240 Vac	Dali2/Push

LOOK PALETTO H580
Look bollard H580




CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7261H	2700 K	Singola emissione Single emission		90	1081 lm	11.5 W	220-240 Vac	Dali2/Push
S.7261W	3000 K			90	1111 lm	11.5 W	220-240 Vac	Dali2/Push
S.7261N	4000 K			90	1153 lm	11.5 W	220-240 Vac	Dali2/Push
S.7266H	2700 K	Doppia emissione Double emission		90	2162 lm	22.0 W	220-240 Vac	Dali2/Push
S.7266W	3000 K			90	2222 lm	22.0 W	220-240 Vac	Dali2/Push
S.7266N	4000 K			90	2306 lm	22.0 W	220-240 Vac	Dali2/Push

LOOK PALETTO H870
Look bollard H870

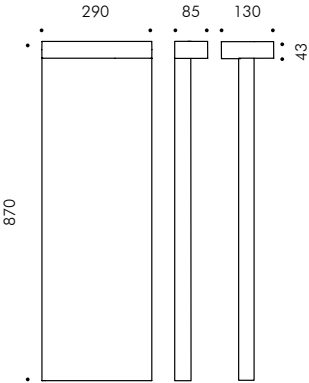

CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7262H	2700 K	Singola emissione Single emission		90	1081 lm	11.5 W	220-240 Vac	Dali2/Push
S.7262W	3000 K			90	1111 lm	11.5 W	220-240 Vac	Dali2/Push
S.7262N	4000 K			90	1153 lm	11.5 W	220-240 Vac	Dali2/Push
S.7267H	2700 K	Doppia emissione Double emission		90	2162 lm	22.0 W	220-240 Vac	Dali2/Push
S.7267W	3000 K			90	2222 lm	22.0 W	220-240 Vac	Dali2/Push
S.7267N	4000 K			90	2306 lm	22.0 W	220-240 Vac	Dali2/Push



ACCESSORI PER TUTTE LE VERSIONI DI LOOK PALETTO
Accessories for all Look bollard versions

S.7269 Flangia da interrare per Look paletto Flange to be buried for Look bollard